



What's Included

KEY COMPONENTS

- 1 Eight position data transfer case
- 2 Three Data loggers w/ plug-in base
- 3 Three Hydrophone and cable kits
- 4 Three SS 2.5" Hydrant Caps
- 5 Data transfer USB cable
- 6 Enigma Classic PC Software
- 7 Enigma Web Portal

DESCRIPTION

The Enigma DL-3H is a 3-logger leak correlation system designed to locate leaks in buried water pipelines, particularly in PVC, HDPE, and large-diameter pipe networks where conventional vibration sensing methods may have reduced performance. Each logger uses a hydrophone installed directly within the water column to detect pressure waves generated by leak activity. The recorded pressure signals are converted into acoustic data for correlation analysis. Leak location is determined by comparing the arrival times of the leak signals between multiple logger positions and applying the known distances between measurement points. Direct sensing within the water column enables the detection of leak signals over greater distances and with higher sensitivity than standard external pipe vibration sensors.

MULTI-POINT NETWORK CORRELATION

After retrieval, the recorded leak sound data is transferred to the host software for correlation analysis. The software processes the acoustic data from each logger pair to calculate and display leak locations between all deployed loggers. Pipe sections, logger positions, and calculated leak locations are displayed graphically to provide a visual representation of the survey area and correlation results.

SEPARATING GENUINE WATER USAGE

Each logger records during three sample periods, typically spaced one hour apart. A characteristic of leak noise is that it is always constant and so if the correlation peak is not present during all three samples then it is due to water use and not leakage.

OPTIMUM LEAK SENSING

Overnight use provides ideal conditions for leak detection. This is because background acoustic noise from traffic, water usage and other sources, is lowest and, at the same time, water system pressure can be higher which greatly aids leak sound propagation.

Hydrophone carrying case w/SS hydrant caps and a data transfer case with 8 position loggers space.

SPECIFICATIONS

CORRELATION DATA LOGGERS

Sensors

Type	Integral Accelerometer
Frequency range	1 - 2,400 Hz
Sensitivity	10 V/g
Attachment	Integral magnet

Sampling

Rate	4860 Hz
Resolution	24-bit
Number of epochs	1, 2, or 3
Epoch duration	60 seconds
Max total recording time	180 seconds

Power

Type	Dual lithium cells
Replaceable	At factory or service center
Operating life	>5 years

Physical

Dimensions	104mm (high) x 59mm (diameter)
Material	Aluminum
Waterproof rating	IP68 Rated - Submersible.
Operating temperature	14°F - 160°F (-10°C to +60°C)

DATA TRANSFER CASE

Host Communications

Type	USB
Rate	2.5 Mbits/sec

Memory

Data Store	32MB static Ram
------------	-----------------

Communications

Type	Optical - Infrared
Rate	2.5 Mbits/sec

Power Supply

Type	User replaceable alkaline 4 cell pack
Physical Dimensions	Holds 8 loggers 410 x 325 x 172 mm
Material	Rugged high impact plastic
Waterproof rating	IP65 Rated
Operating temperature	14°F - 160°F (-10°C to +60°C)

Hydrophone




Hydrophone connected externally	1- 2400 Hz
	-195dB
	1" NPT connection + pipe adapters



SubSurface Instruments, Inc. | 1230 Flightway Drive, De Pere, WI. 54115
Toll free: 855.422.6346 | **Website:** www.ssilocators.com | **email:** info@ssilocators.com



CORRELATION SCREENS - CLOUD VERSION

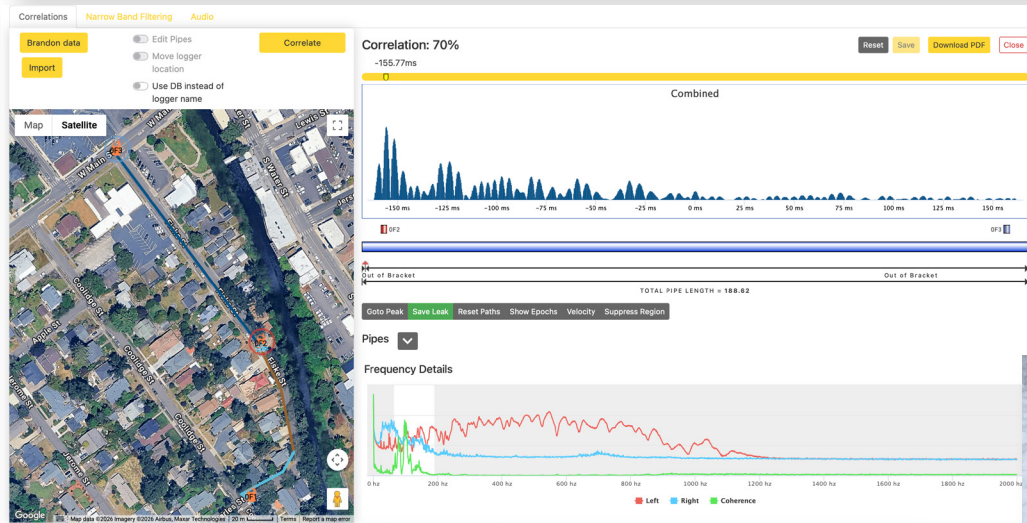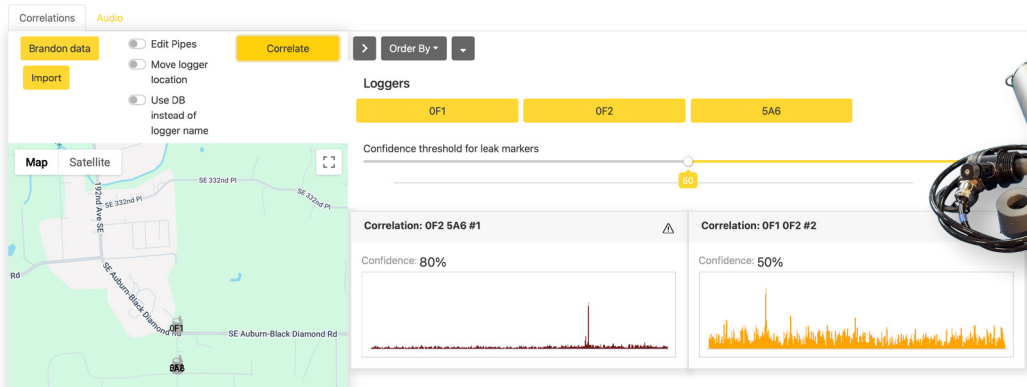

CORRELATION SCREENS - PC VERSION

